

Energy Saving



DATA SHEET

System Overview

Swimming Pool circulation pumps use a considerable amount of energy, this energy can be reduced by installing an inverter which will control the speed of the circulation pumps.

Most swimming pool and spa circulation pumps are oversized due to the limited range of pump sizes available. This is so that designed turnover periods can be maintained. The result of this is a build up of pressure not an increase in flow rate within the system, which in turn causes poor filtration. By reducing the pump speed, pressure is reduced and the system will work to the ideal flow rate and pressure, therefore improving filtration efficiency. By reducing the pump speed / pressure during filtration, the pump speed can be automatically increased for backwashing which will then also improve backwashing efficiency.

The inverter, controlled by the TEC2000ECS, can also reduce the pump speed when the pool chemical levels have been maintained within a window for a preset time.



omron Inverter

Energy saving results

The graphs below are taken from a site that ran three 3 kilowatt pumps running 24 hours a day. Two pumps were installed on the 25 meter swimming pool and one on the commercial spa.


The data on the graphs was recorded independently of Topline via a remotely interrogated datalogging system installed by the client.

In addition clamp meter readings were taken by Topline which directly support the results recorded.

Pool Pump 1 running with no inverter used 3.45kw

Pool Pump 2 running with no inverter used 3.40kw

Spa Pump running with no inverter used 3.45kw

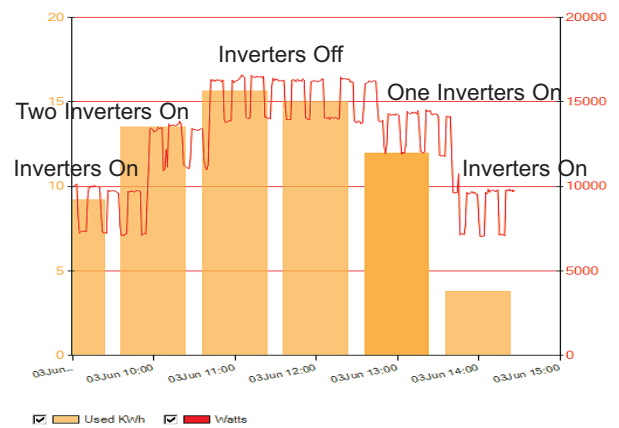

Test Description

During the test we used the inverters control function to operate the pumps at 50Hz, this is seen on the above graph at 11-00. We then ran the inverters at full speed, to see check that the increase use of power was not associated with any other equipment in the plant room. After the full speed power check we began to lower the pump speed by decreasing the inverter frequency to 40 Hz. This is shown on the graph between 13-00 -15-00. The energy saved by all three inverters at this lower speed was 6.76kw.

After the tests using the remote monitoring system we confirmed the energy usage with a clamp meter which actually showed slightly better savings, but for the purpose of this document the remote monitoring figures have been used in our calculations.

TEC 2000 ECS



Energy efficient LED lights

When the TEC2000ECS is combined with energy efficient LED lighting further significant savings can be made. Please refer to separate LED light data sheet for a detailed specification.



Sample quotation with energy and CO2 savings

The quotation is for a leisure club with a 20 metre swimming pool and 3 metre diameter spa. The swimming pool uses two 3 kw circulation pumps and the spa one 3KW circulation pump. Energy costs are 7p per unit. The swimming pool had installed six 300w under water lights which were lasting 4 months before requiring a bulb change. The savings made are based on bulb costs and energy costs.

	Qty	Cost	Total	Savings per year
TEC2000ECS Controlled inverter	2	£900-00	£1800-00	
Inverter 3 kW	3	£787-00	£1620-00	£3587-22
LED lights blue	6	£235-00	£1410-00	£1382-26
Installation	1	£2070-00	£2070-00	
		Total Cost	£6900-00 ex VAT	

Pay back period on capital cost 1.39 years

CO2 savings based on carbon trust calculation with electricity from the national grid of 33,791 kg.

To obtain a saving for your own centre please email sales@topline.uk.net.

Technical data for standard inverters

(Single phase and larger 3 phase inverters are available to special order)

Model	Capacity
TEC2000CIMR-V7TZ42P205	2.2KW 5.5A, 415VAC, 3 phase open loop vector - IP65
TEC2000CIMR-V7TZ43P005	3.0KW 7.2A, 415VAC, 3 phase open loop vector - IP65
TEC2000CIMR-V7TZ44P005	4.0KW 9.2A, 415VAC, 3 phase open loop vector - IP65
TEC2000CIMR-E7Z47P52A	7.5KW 17A, 415VAC, 3 phase - IP54
TEC2000CIMR-E7Z40112A	11KW 24A, 415VAC, 3 phase - IP54
TEC2000CIMR-E7Z40152A	15KW 31A, 415VAC, 3 phase - IP54



Topline Electronics Limited

Unit A8 Ropemaker Park
Diplocks Way Industrial Estate
Hailsham, East Sussex BN27 3GU

Tel: 01323 440760 Fax: 01323 844508

Email: sales@topline.uk.net

Internet: www.topline.uk.net